



DK SERIES

DK861DH4


86" 3500 nits 4K UHD Outdoor Ultra-High Brightness Hybrid Kiosk with Light Box




HYBRID
DIGITAL & STATIC



VANDAL
RESISTANT



SUNLIGHT
VIEWABLE IMAGE



SMART
LIGHT BOX



WEATHER
PROOF

FOR MORE INFORMATION


For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan

SPECIFICATION

MODEL	DK861DH4	
DISPLAY	LCD Panel Size	85.6 inches LCD (x1)
	Native Resolution	3840 x 2160
	Brightness (w/o glass)	3,500 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
	Light Lifetime (Typ.)	100,000 hrs
	Blackening Defect Free	Up to 110°C (230°F)
	Polarized Sunglasses Support	Yes
LIGHT BOX	Bezel Width (T/B/L/R)	190.0 / 190.0 / 95.5 / 95.5 mm
	Poster Size (WxH)	1200 × 1800 mm
	Kiosk Visual Opening (WxH)	1160.0 x 1710.0 mm
POWER	Power Supply	Internal
	Rated Voltage	200-240V ~ 50/60Hz
	Power On Mode (Typ./ Max)	720 W / 1500 W
MECHANICAL SPECS	Digital Side Bezel Width (T/B/L/R)	95.2 / 106.7 / 134.4 / 134.4 mm
	Cabinet Color	Black
	Dimension (WxHxD, w/o stand)	1338.0 x 2174.0 x 254.0 mm
	Weight	400 kg
	Orientation	Portrait
	Glass	Double Laminated Tempered
	Air Vent	Top & Bottom
USER INTERFACE	Language	English
	Internal Temperature Sensor	Yes
	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
INPUT	HDMI	x3 (2160p)
	DisplayPort	x1
	USB 3.0	x1
	Micro SD Slot	x1
OUTPUT	Audio	x1
EXTERNAL CONTROL	RS-232	In x1
	RJ-45	x2 (LAN)
ENVIRONMENT	Operating Temperature	-30° ~ 50° C
	Storage Temperature	-20° ~ 60° C
	Humidity	10% ~ 100% RH Non-condensing
	Water and Dust resistant design	IP56
CERTIFICATION	CE / FCC / IEC60950-22 / RoHS	

DIMENSIONS

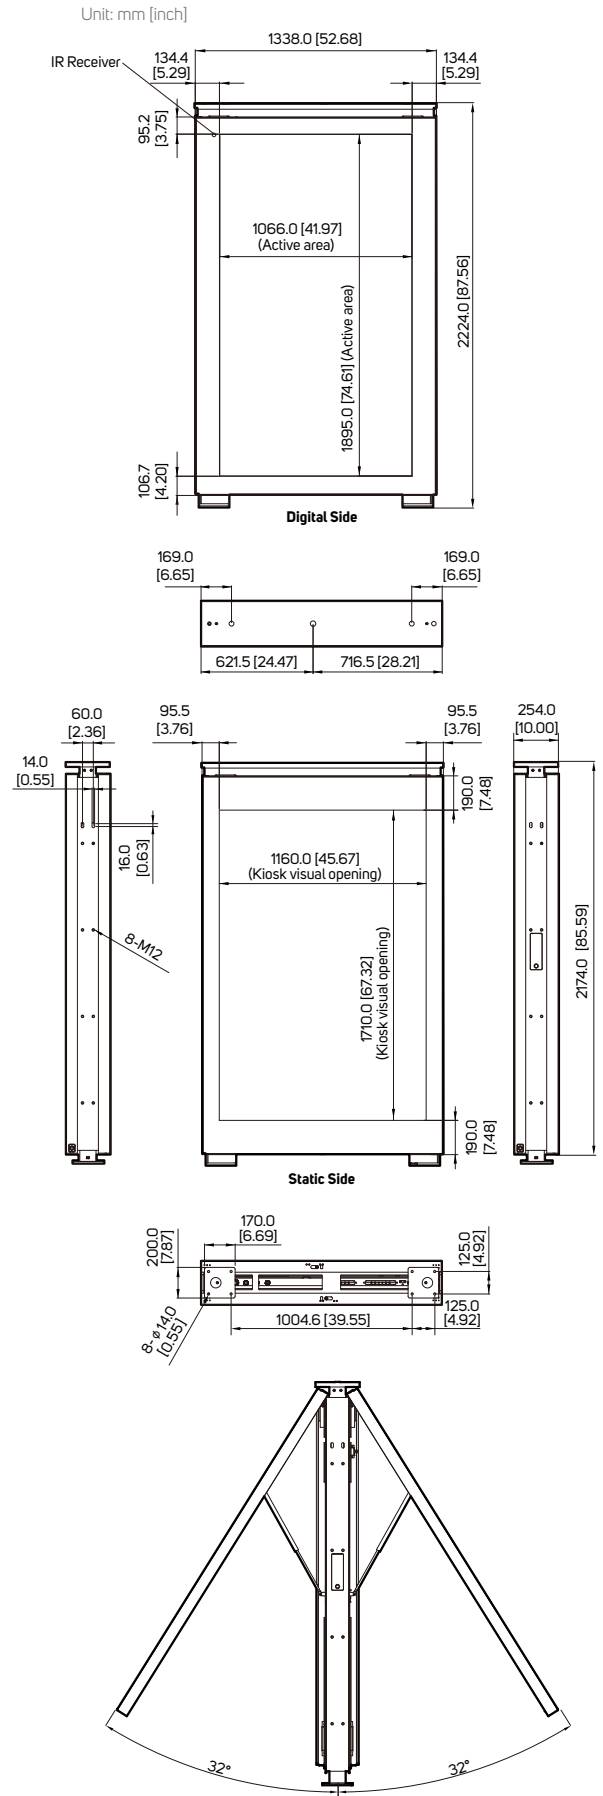

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.