


DS SERIES

DS491LT4

49" Fanless High Brightness Digital Signage Display



SUNLIGHT
VIEWABLE IMAGE



FANLESS



BUILT-IN
MEDIA PLAYER



24 / 7
OPERATION



TRUECOLOR™
CALIBRATED

Android is a trademark of Google LLC.
The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.



DynaScan

SPECIFICATION

MODEL	DS49ILT4	
PANEL	LCD Panel Size	48.5 inches LCD
	Native Resolution	1920 x 1080
	Brightness	3500 nits
	Color Depth	10 bits
	Contrast Ratio	3000 : 1
	Response Time (Typ.)	8 ms
	Viewing Angle	178° / 178°
POWER	Light Lifetime (Typ.)	100,000 hrs
	Polarized Sunglasses Support	Yes
	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
	Power On Mode (Typ./ Max.)	160 W / 230 W
	Power Saving Mode	< 1 W
	AC out	< 100 W
MECHANICAL SPECS	Bezel Width (T/B/L/R)	8.7 / 8.7 / 8.5 / 8.5 mm
	Cabinet Color	Black
	Monitor Dimension (LxHxD)	1096.7 x 627.2 x 82.3 mm
	Monitor Weight	19.6 kg
	Orientation	Portrait / Landscape
	VESA Mounting (LxH)	400 x 400 mm
	Carrying Handles	Yes
USER INTERFACE	Fanless Design	Yes
	Language	English
	Built-in Video Wall Support	Up to 15x15
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Image Retention Protection	Yes
	Auto Orientation Sensor	Yes
INPUT	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
	HDMI 1.4 b (HDCP 1.4)	x1 (1080p)
	DVI-D	x1
	DisplayPort 1.2	x1
OUTPUT	USB 2.0	x1 (For Internal Player)
	SD Slot	x1 (For Internal Player)
	DVI-D	x1
EXTERNAL CONTROL	Audio	x1
	RS-232	In x1, Out x1
	RJ-45	x1 (LAN)
INTERNAL PLAYER	Processor	ARM Quad-Core Cortex-A9
	Clock speed	1.6 GHz
	Main memory interface	DDR3L-1066, 1GB
	Graphics	Mali400MP4, support OpenGL ES1.1/2.0, Open VG1.1
	Storage	Internal: Nand flash 8GB(multi sources) External: Support SD , Up to 32GB
	Multimedia	Multi-format 1080P video decoders (H.264,VC-1, MPEG-1/2/4, H.263, H.264 MVC, AVS, VP8/6, RV)
	Wireless Function	Yes
ENVIRONMENT	Operating System	Android 4.4.2
	Operating Temperature	0° C ~ 45° C
	Storage Temperature	-20° C ~ 60° C
CERTIFICATION	Humidity	10% ~ 80% RH Non-condensing
		CE / FCC / RoHS

DIMENSIONS

Unit: mm [inch]

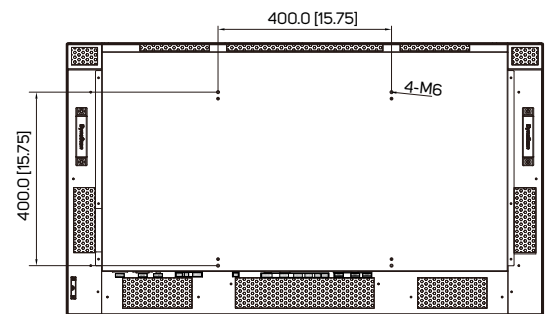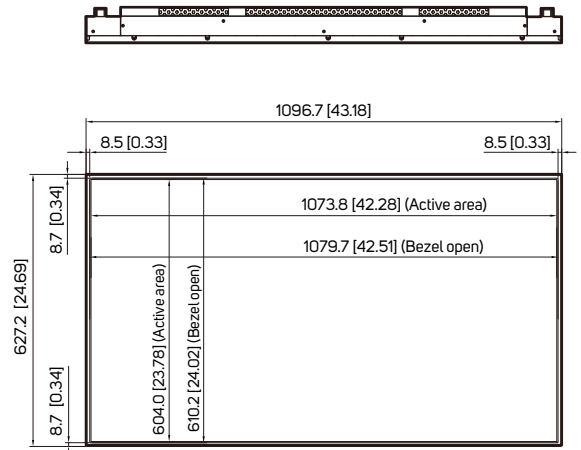

INTERFACE

